

# ARC Lossy Foam Series

## ARC LS-10426 (LS-26 Series)

Description: Flexible, low density, high loss, carbon impregnated foam.

Standard Thickness: 1.000" (25.4mm)

Standard Sheet Size: 24" x 24" (60.96 x 60.96cm)

Density: 5 lbs/cu ft (80 kg/M<sup>3</sup>)

Resistance: 300 ohms/sq


Color: Black

Temp. Range: -70°F to + 250°F (-56.7°C to 121.1°C)

Features:

- PSA: A high performance unsupported acrylic transfer film adhesive is available. PSA thickness is .002" (0.51mm)
- Top Coat: Tough acrylic sealant (optional)
- Ground Film: Conductive Mylar when specified

Insertion Loss - 2-18GHz (typical):

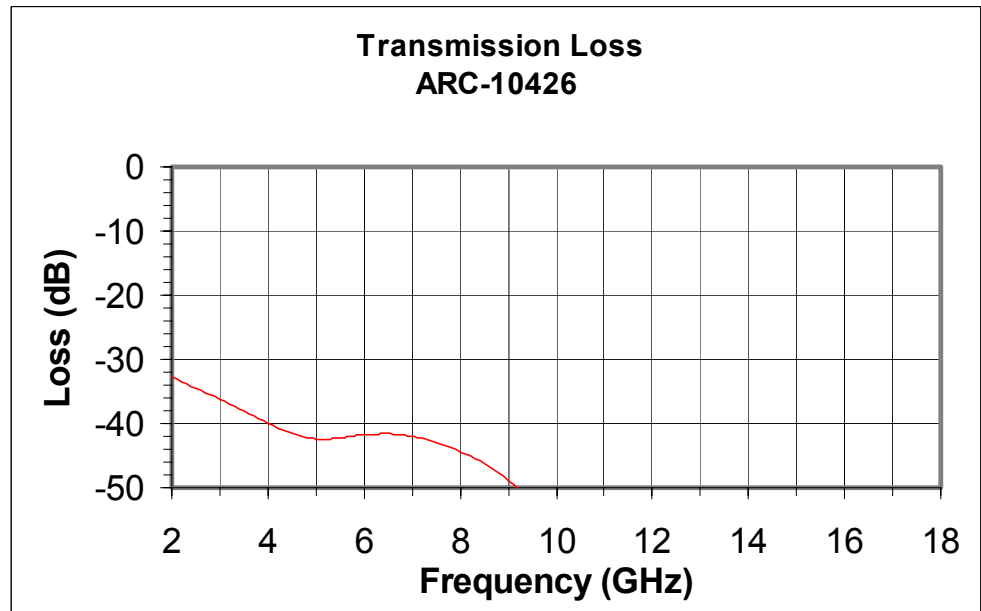

*Solutions for Interference Control*

ARC Technologies, Inc.  
11 Chestnut Street, Amesbury, MA 01913  
978-388-2993 Fax: 978-388-6866  
[www.arc-tech.com](http://www.arc-tech.com)