

LS-10054

Description: Flexible, low density, high loss, carbon impregnated foam.

Sheet Size: 24" x 24" \pm 0.25" (60.96cm x 60.96cm \pm 6.35mm)

Thickness: 0.50" \pm 0.062" (12.7mm \pm 1.57mm)

Temperature Range: -70° to +250°F (-56°C to 121°C)

Optional Features


PSA (Pressure Sensitive Adhesive)

Surface Coating (Acrylic Sealant)

Ground Film (Conductive Mylar)

Electrical Data (Typical Insertion Loss)

LS-10054

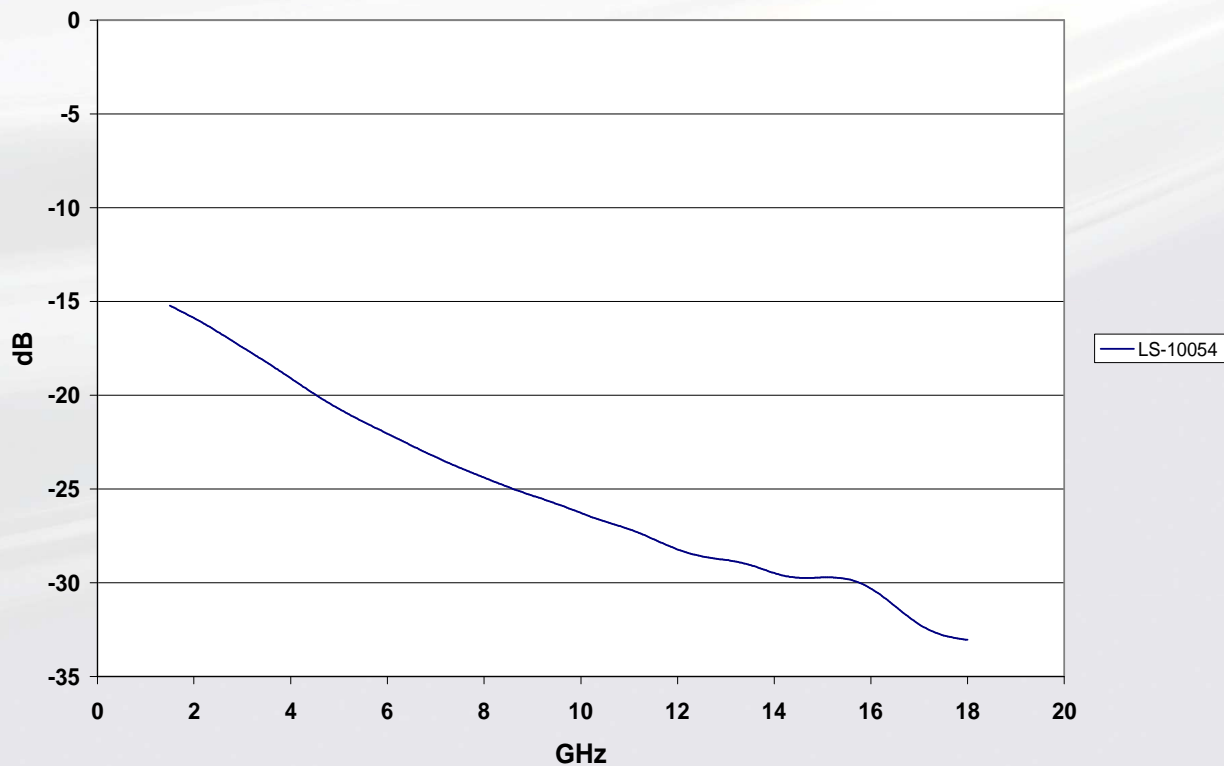

NOTE the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

www.arc-tech.com