

## LS-10055-108

**Description:** Flexible, low density, high loss, carbon impregnated foam bonded to a thin layer of closed cell foam. This product is RoHS and REACH compliant.

**Sheet Size:** 12" x 12"  $\pm$  0.250" (30.48cm x 30.48cm  $\pm$  6.35mm)

**Thickness:** 0.187"  $\pm$  0.032" (4.75mm  $\pm$  0.812mm)

**Temperature Range:** -70° to +250°F (-56°C to 121°C)


### Optional Features

PSA (Pressure Sensitive Adhesive)

Waterjet Cutting

Die Cutting

### Electrical Data (Typical Insertion Loss)

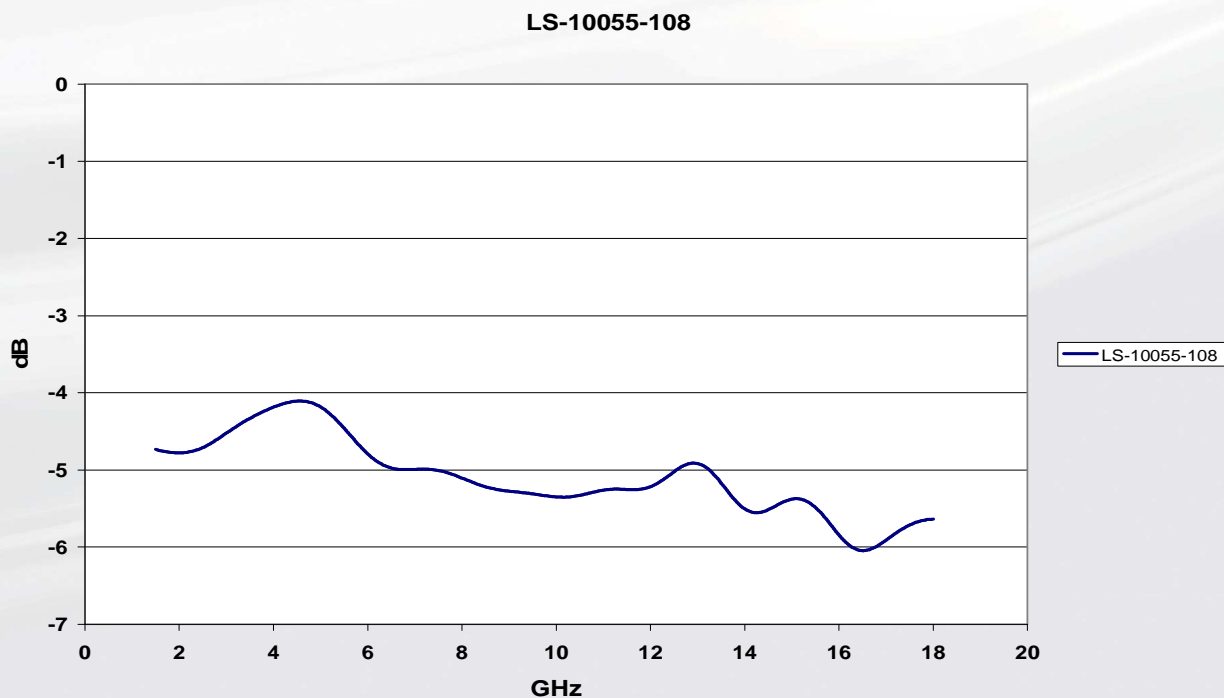

\*NOTE\* the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

[www.arc-tech.com](http://www.arc-tech.com)