

LS-10121-1

Description: Flexible, low density, high loss, carbon impregnated foam. This product is RoHS and REACH compliant.

Sheet Size: 24" x 24" \pm 0.25" (60.96cm x 60.96cm \pm 6.35mm)

Thickness: 0.500" \pm 0.062" (12.7mm \pm 1.57mm)

Temperature Range: -70° to +250°F (-56°C to 121°C)


Optional Features

PSA (Pressure Sensitive Adhesive)

Waterjet Cutting

Die Cutting

Electrical Data (Typical Insertion Loss)

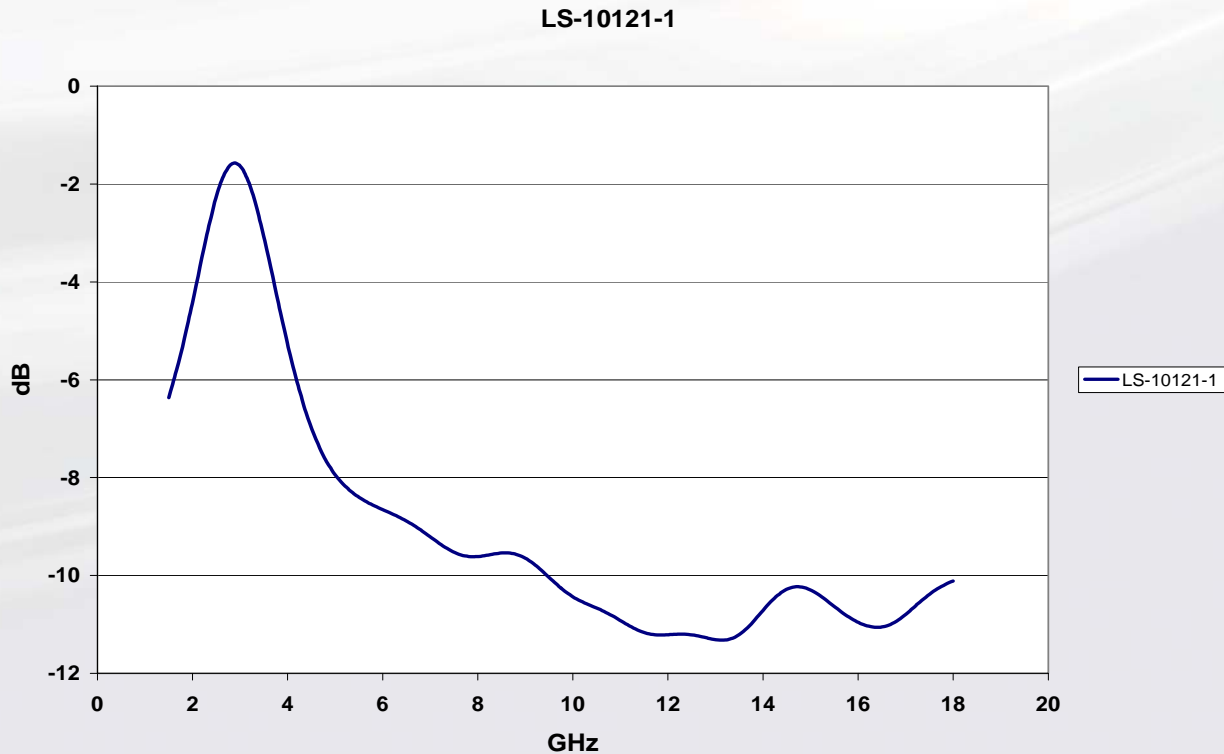

NOTE the information above is accurate at time of publication, but it is incumbent on the end user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

www.arc-tech.com