

## LS-10166

**Description:** Flexible, low density, high loss, carbon impregnated foam.

**Sheet Size:** 24" x 24"  $\pm$  0.25" (60.96cm x 60.96cm  $\pm$  6.35mm)

**Thickness:** 0.125" (3.175mm)


**Temperature Range:** -70° to +250°F (-56°C to 121°C)

### Optional Features

PSA (Pressure Sensitive Adhesive)

Conductive Ground Plane

### Electrical Data (Typical Insertion Loss)

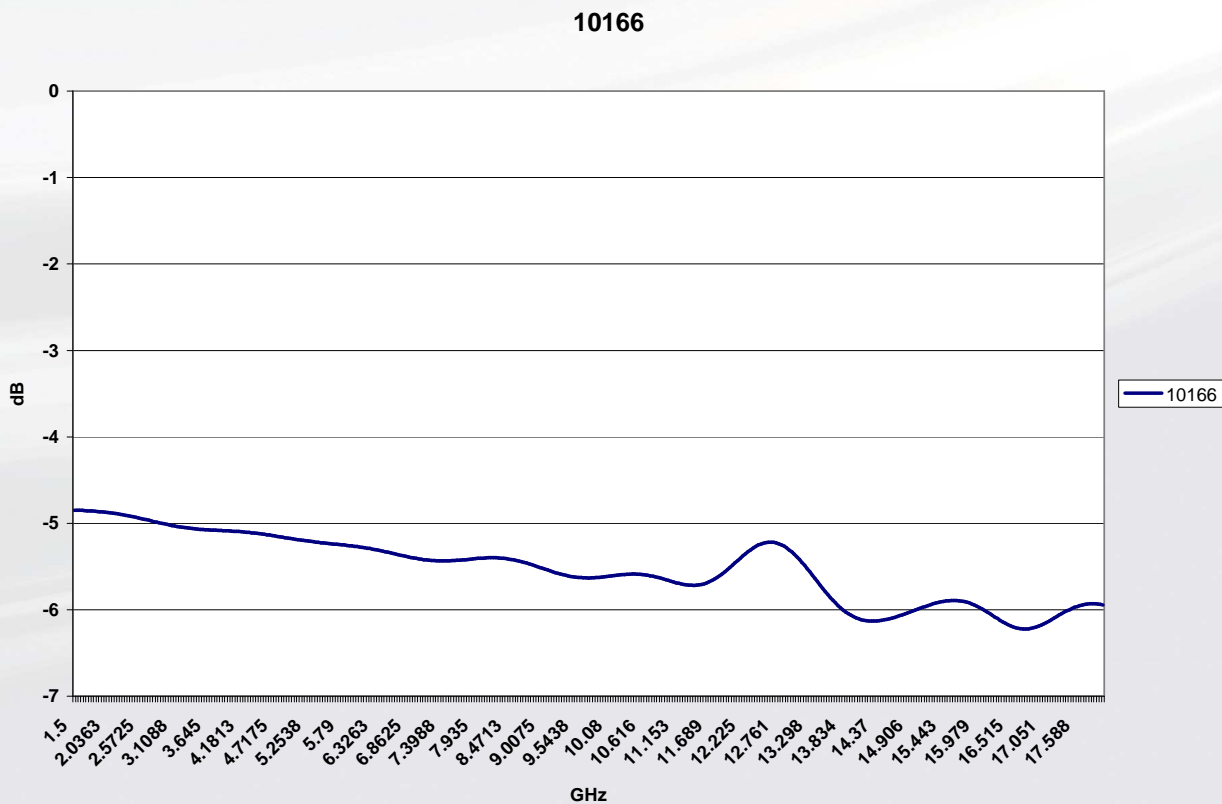

\*NOTE\* the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

[www.arc-tech.com](http://www.arc-tech.com)