

LS-10211-121

Description: Flexible, low density, high loss, carbon impregnated foam. This product comes with an acrylic coating and PSA (Pressure Sensitive Adhesive). This product is RoHS and REACH compliant.

Sheet Size: 24" x 24" \pm 0.0625" (60.96cm x 60.96cm \pm 6.35mm)

Thickness: 0.25" \pm 0.063" (6.35mm \pm 1.6mm)


Temperature Range: -70° to +250°F (-56°C to 121°C)

Optional Features

Waterjet Cutting
Die Cutting

Electrical Data (Typical Insertion Loss)

Insertion Loss 10211-121

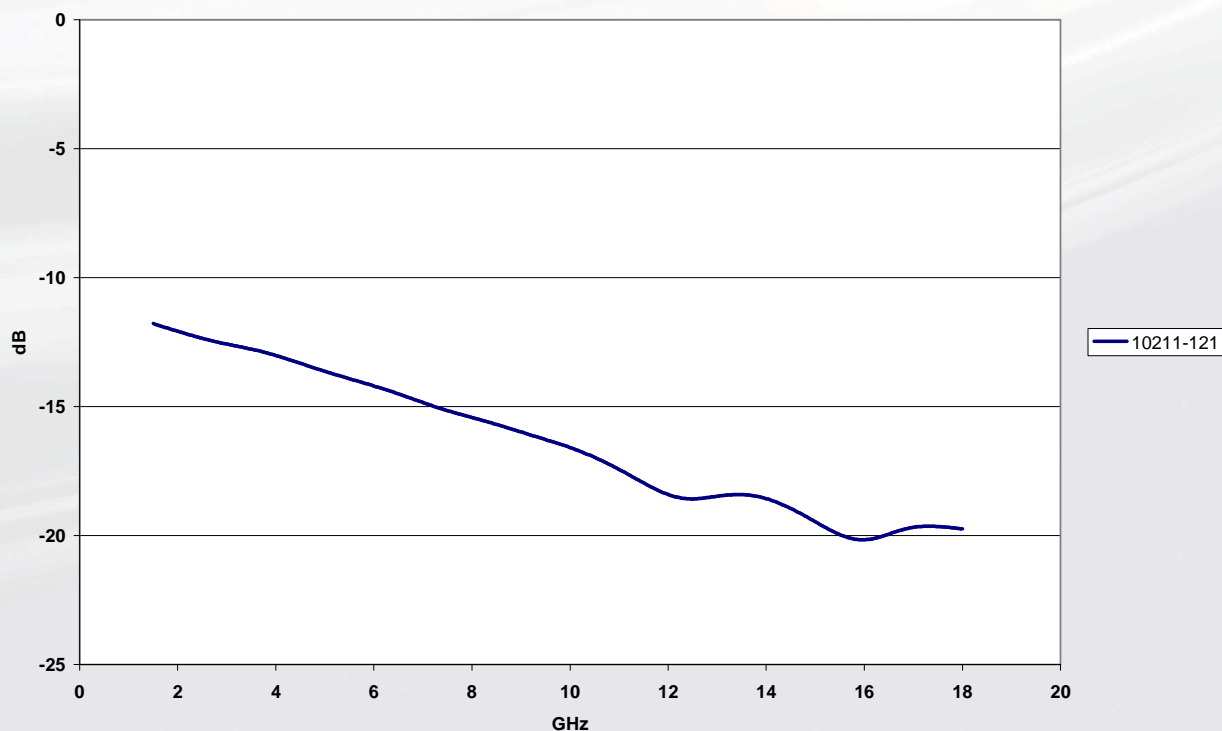

NOTE the information above is accurate at time of publication, but it is incumbent on the end user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

www.arc-tech.com