

LS-10211-95

Description: Flexible, low density, high loss, carbon impregnated foam. A 2-mil polyester film is laminated to the top surface. PSA is applied to the bottom surface for easy installation. This product is RoHS and REACH compliant.


Sheet Size: 24" x 24" \pm 0.250" (60.96cm x 60.96cm \pm 6.35mm)

Thickness: 0.250" \pm 0.062" (6.35mm \pm 1.58mm) exclusive of film and PSA

Temperature Range: -70° to +250°F (-56°C to 121°C)

Electrical Data (Typical Insertion Loss)

Insertion Loss 10211-95

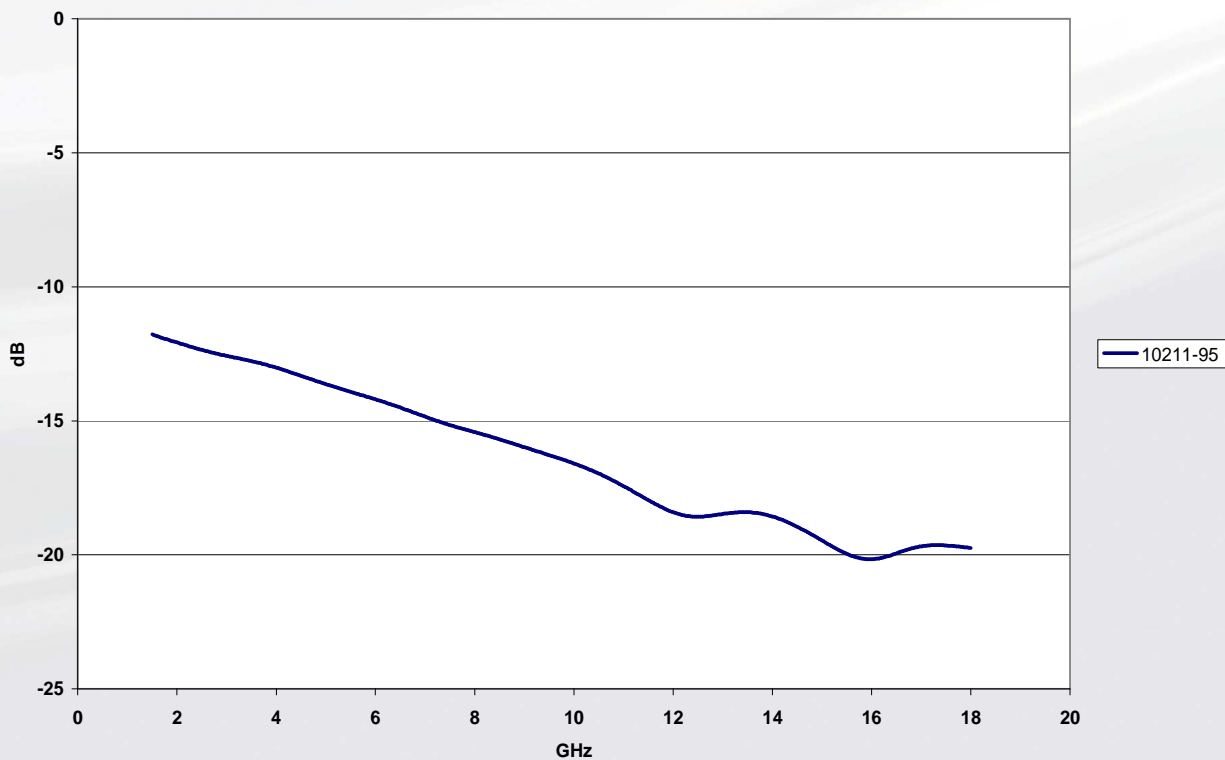

NOTE the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

www.arc-tech.com