

LS-11073-9

Description: Flexible, low density, high loss, carbon impregnated foam.

Sheet Size: 24" x 24" \pm 0.25" (60.96cm x 60.96cm \pm 6.35mm)

Thickness: 3.0" \pm 0.062" (76.2mm \pm 1.5748mm)

Temperature Range: -70° to +250°F (-56°C to 121°C)

Optional Features


PSA

Top Coat: Acrylic Sealant

Ground Film: Conductive Mylar

Electrical Data (Insertion Loss)

LS-11073-9

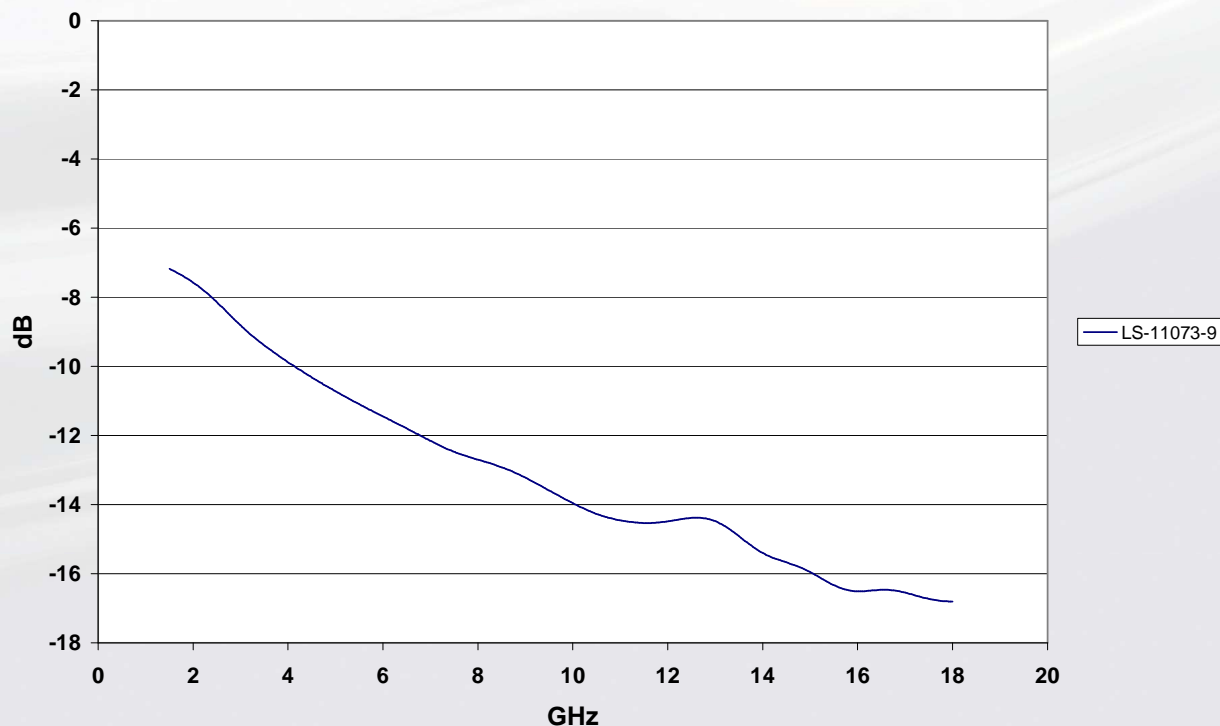

NOTE the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

www.arc-tech.com