

## ML-10051 (ML-75 Series)

**Description:** Multi-layered broadband absorber consisting of graduated layers of loaded open-cell urethane foam.

**Sheet Size:** 24" x 24" (60.96cm x 60.96cm) +/- 0.25" (0.635cm)

**Thickness:** 1.125" (28.575mm)

**Temperature Range:** -70° to +270°F (-56°C to 132°C)


### Optional Features

**PSA** (Pressure Sensitive Adhesive)

**Surface Coating** (Acrylic Sealant)

**Ground Film** (Conductive Mylar)

### Electrical Data (Reflection Loss)

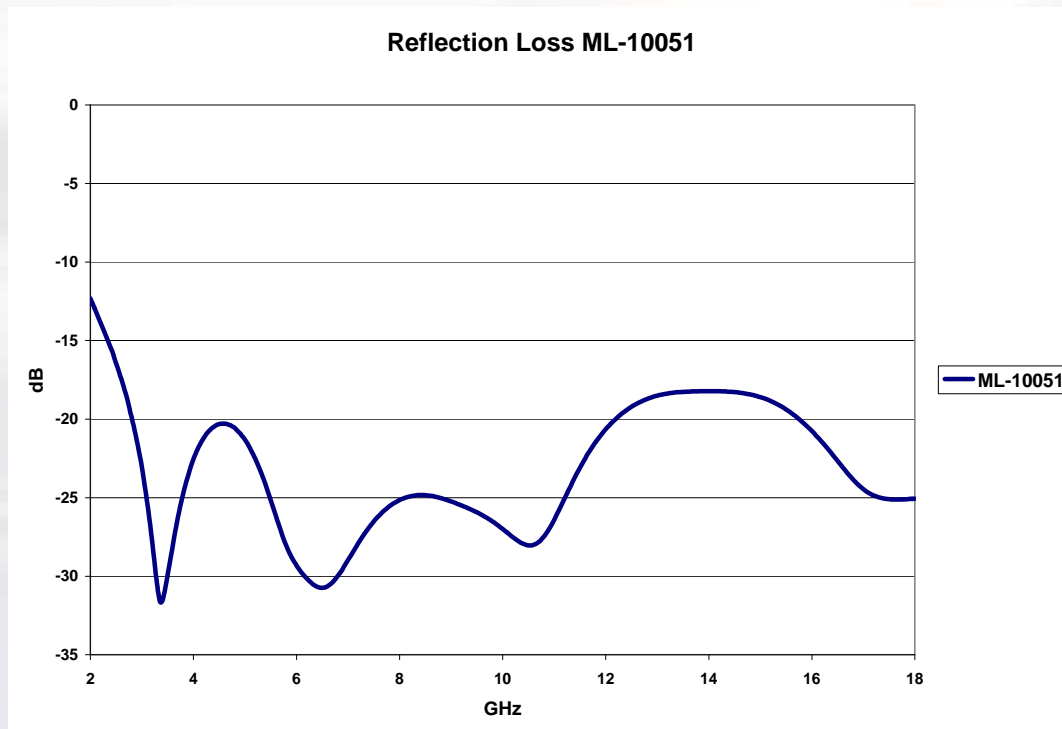

\*NOTE\* the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

[www.arc-tech.com](http://www.arc-tech.com)