

RC-10420

Description: Flexible, low density, high loss, carbon impregnated reticulated and convoluted broadband foam absorber. This product is halogen free, RoHS and REACH compliant.

Sheet Size: 24" x 24" \pm 0.25" (60.96cm x 60.96cm \pm 0.365cm)

Thickness: 1.5" (3.81cm)

Temperature Range: -94° to +300°F (-70°C to 148°C)


Optional Features

PSA (Pressure Sensitive Adhesive)

Surface Coating (Acrylic Sealant)

Ground Film (Conductive Mylar)

Electrical Data (Typical Reflection Loss)

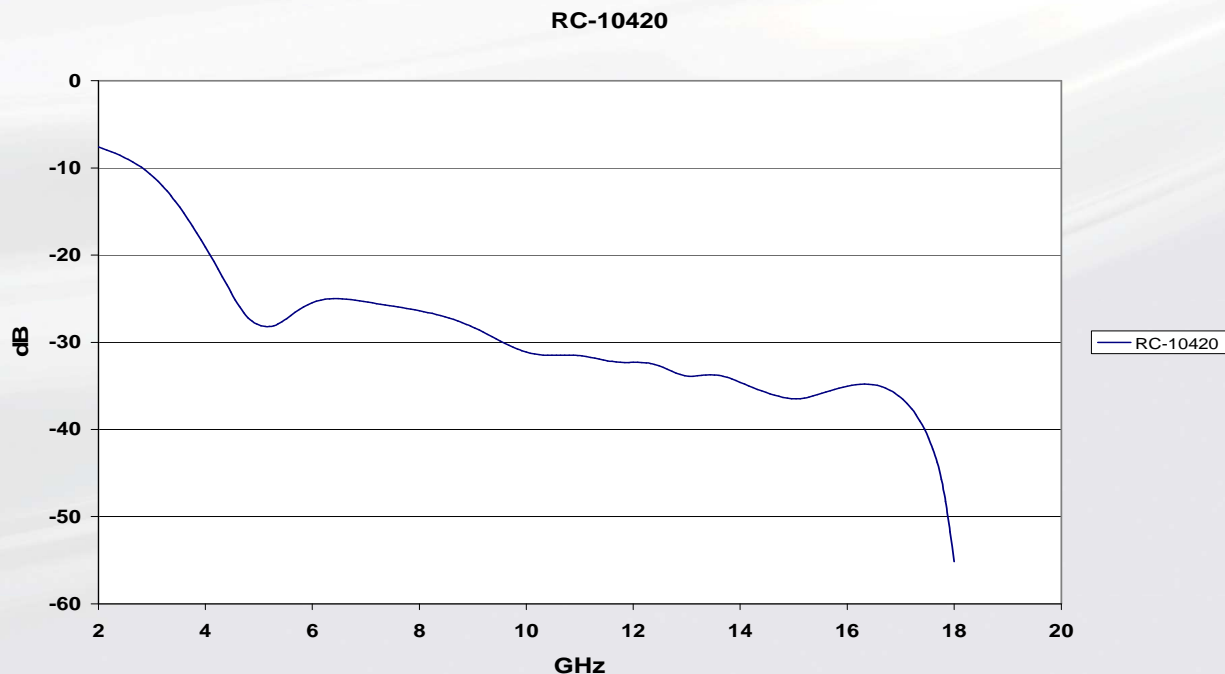

NOTE the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

www.arc-tech.com