

RT-11134

Description: Flexible, low density, high loss, carbon impregnated reticulated foam.

Sheet Size: 24" x 24" \pm 0.25 (60.96cm x 60.96cm \pm 0.635cm)

Thickness: 4.0" \pm 0.25 (10.16cm \pm 0.635cm)

Temperature Range: -65° to +250°F (-54°C to 121°C)

Optional Features


PSA (Pressure Sensitive Adhesive)

Surface Coating (Acrylic Sealant)

Ground Film (Conductive Mylar)

Electrical Data (Typical Reflection Loss)

Reflection Loss of RT-11134

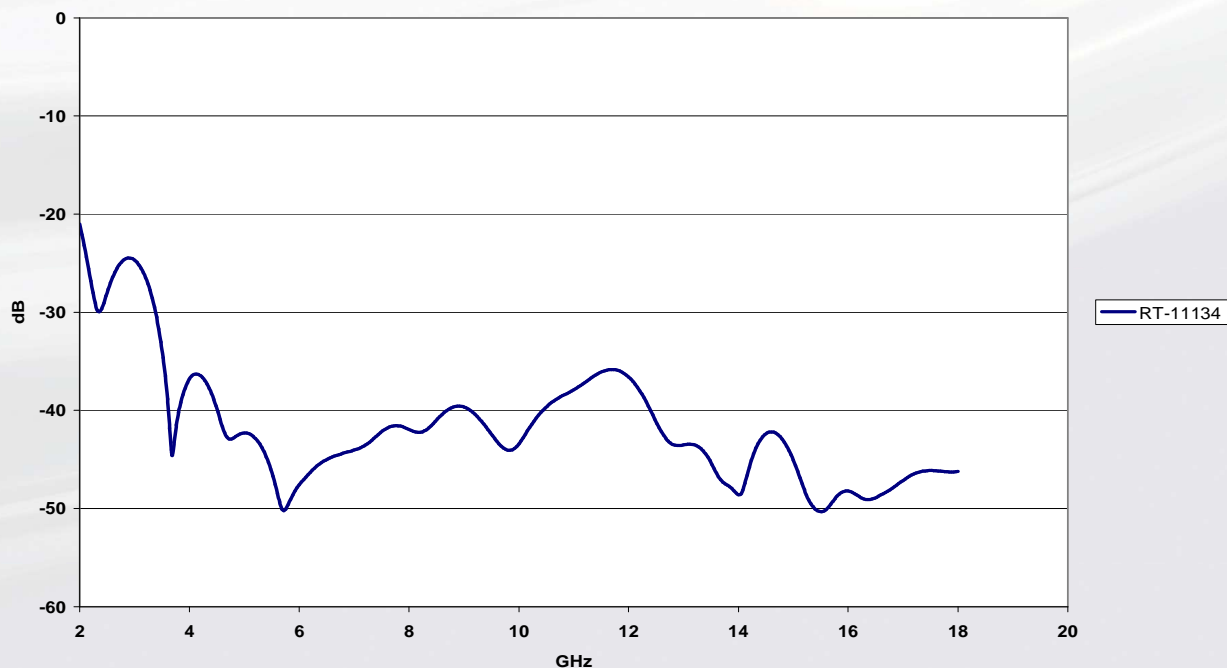

NOTE the information above is accurate at time of publication, but it is incumbent on the end user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

www.arc-tech.com