

DD-10218-1

Description: Flexible, narrowband, carbonyl iron loaded silicone rubber based microwave absorber tuned for mode suppression in an enclosed cavity, signal isolation and surface current attenuation. This product is halogen free, RoHS and REACH compliant.

Sheet Size: 12" x 12" ± .125

Thickness: 0.200 ± .005

Temperature Range: -67° to +375°F (-51°C to 190°C)

Flammability Rating: UL94 V-0 (file number E204422)


Mechanical Data

Durometer (Shore Rating):	ASTM D2240-03	72 Shore A
----------------------------------	----------------------	------------

Optional Features

PSA
Waterjet Cutting
Die Cutting

Electrical Data (Reflection Loss)

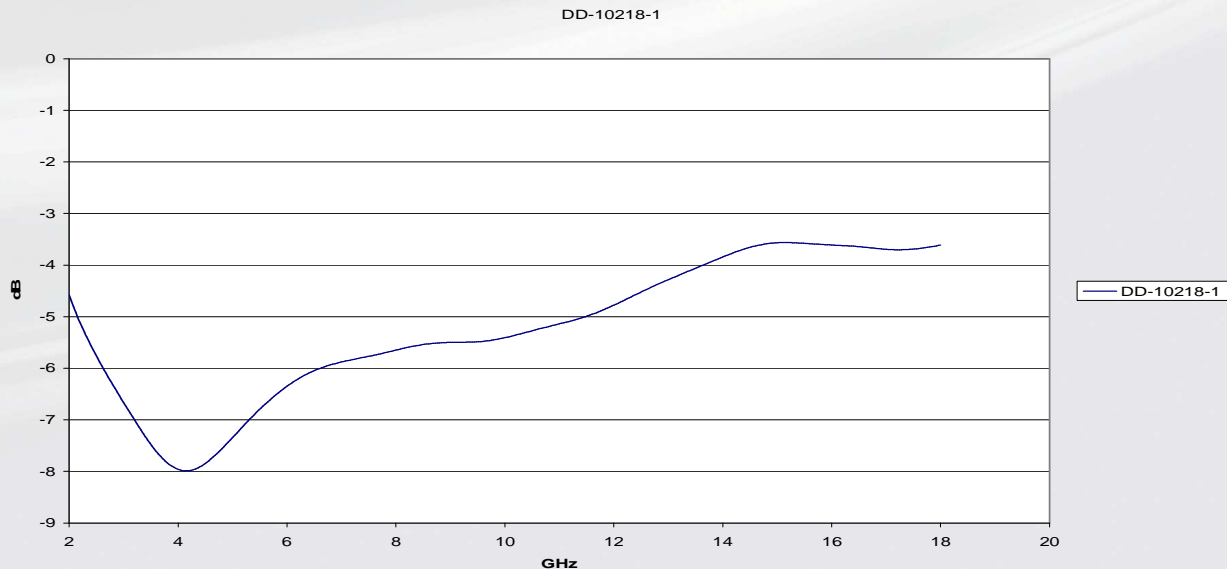

NOTE the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

www.arc-tech.com