

## DD-11196

**Description:** Flexible, narrowband, carbonyl iron loaded silicone rubber based microwave absorber tuned for mode suppression in an enclosed cavity, signal isolation and surface current attenuation. This product is halogen free, RoHS and REACH compliant.

**Sheet Size:** 12" x 12"  $\pm$  .125 (30.48 x 30.48  $\pm$  0.32cm)

**Thickness:** 0.125  $\pm$  .005 (3.18  $\pm$  0.127mm)


**Temperature Range:** -67° to +375°F (-51°C to 190°C)

**Flammability Rating:** UL94 V-0 (file number E204422)

### Optional Features

PSA  
Waterjet Cutting  
Die Cutting

### Electrical Data (Reflection Loss)

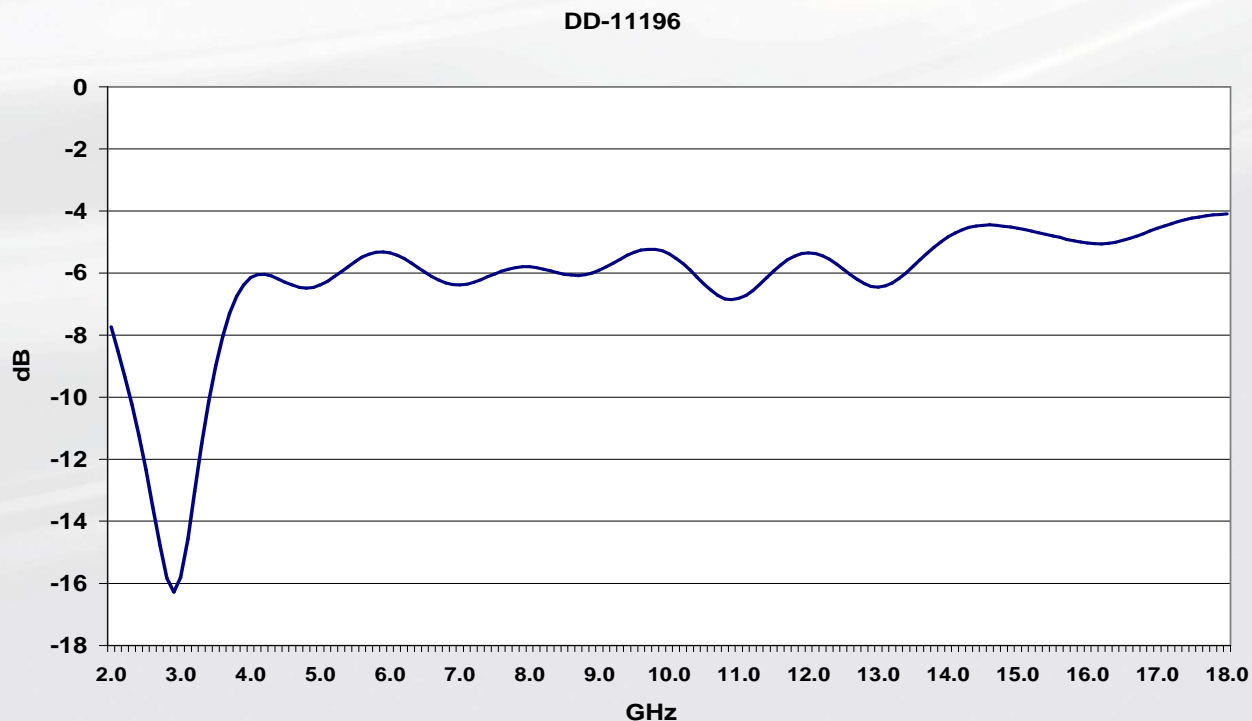

\*NOTE\* the information above is modeled data and accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

[www.arc-tech.com](http://www.arc-tech.com)