

## DD-14505-1

**Description:** Flexible, narrowband, loaded silicone rubber based microwave absorber tuned for mode suppression in an enclosed cavity, signal isolation and surface current attenuation. . This product is halogen free, RoHS and REACH compliant.

**Sheet Size:** 12" x 12"  $\pm$  .125" (30.48cm x 30.48cm  $\pm$  0.318cm)

**Thickness:** 0.070"  $\pm$  .005" (1.78mm  $\pm$  0.127mm)

**Temperature Range:** -67° to +375°F (-51°C to 190°C)

**Flammability Rating:** UL94 V-0 (file number E204422)

### Optional Features


PSA (Pressure Sensitive Adhesive)

Waterjet Cutting

Die Cutting

### Electrical Data (Typical Reflection Loss)

DD-14505-1

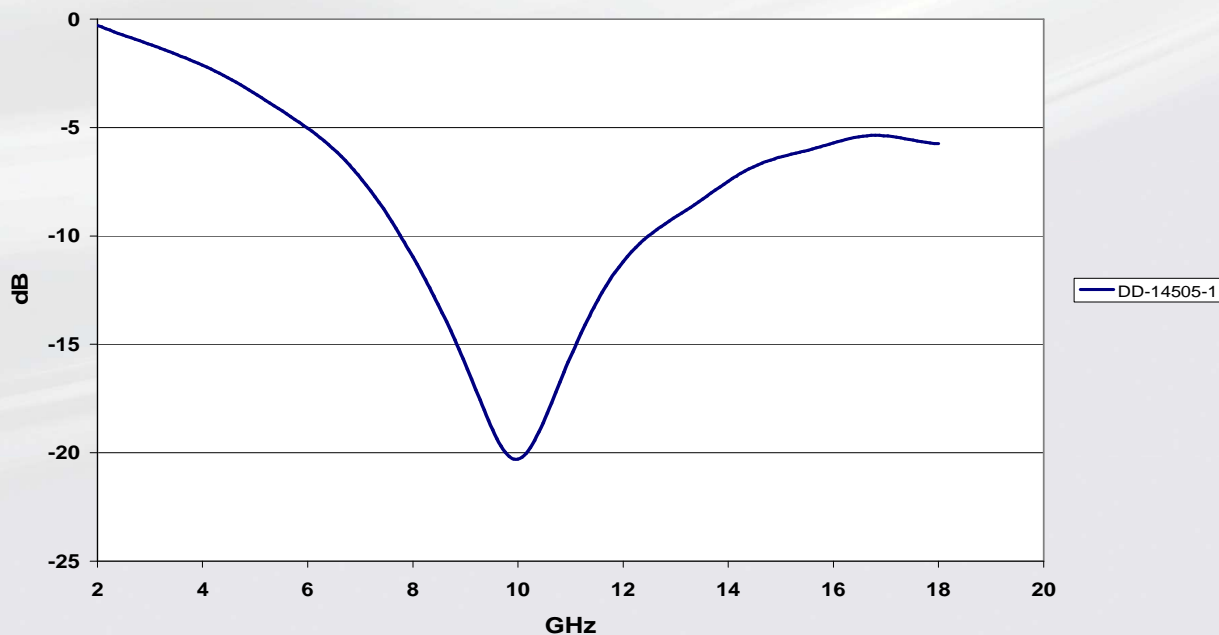

\*NOTE\* the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

[www.arc-tech.com](http://www.arc-tech.com)