

## DD-61007

**Description:** Flexible, narrowband, loaded silicone rubber based microwave absorber tuned for mode suppression in an enclosed cavity, signal isolation and surface current attenuation. This product is halogen free, RoHS and REACH compliant.

**Sheet Size:** 12" x 12"  $\pm$  .125 (30.48cm x 30.48cm  $\pm$  0.318cm)

**Thickness:** 0.010"  $\pm$  0.002" (0.254mm  $\pm$  0.051mm)

**Temperature Range:** -67° to +375°F (-51°C to 190°C)

### Optional Features


PSA

Waterjet Cutting

Die Cutting

### Electrical Data (Typical Reflection Loss)

DD-61007

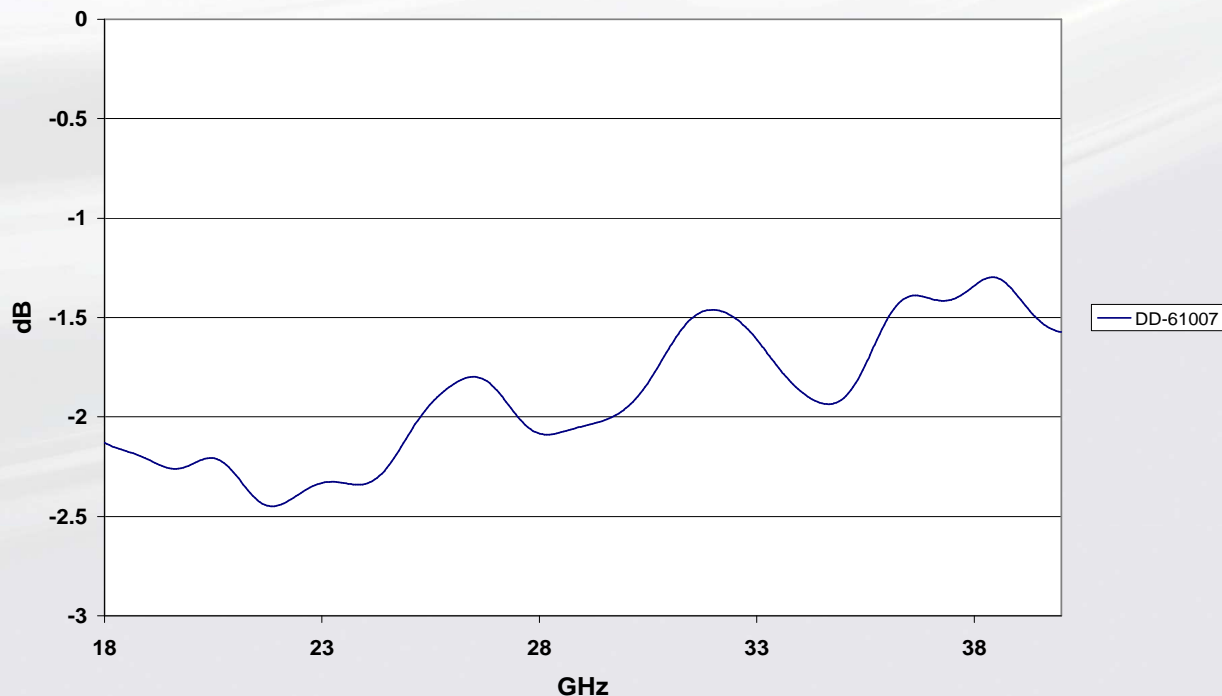

\*NOTE\* the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

[www.arc-tech.com](http://www.arc-tech.com)