

UD-11645-2

Description: Flexible, broadband, loaded urethane rubber based microwave absorber tuned for mode suppression in an enclosed cavity, signal isolation and surface current attenuation.

Sheet Size: 12" x 12" \pm 0.125" (30.48cm x 30.48cm \pm 0.318cm)

Thickness: 0.015" \pm .0005" (0.381mm \pm 0.127mm)

Temperature Range: -60° to +275°F (-51°C to 135°C)

Mechanical Data

Durometer (Shore Rating): 75 Shore A

Optional Features


PSA (Pressure Sensitive Adhesive)

Waterjet Cutting

Die Cutting

Electrical Data (Typical Reflection Loss)

Reflection Loss 11645-2

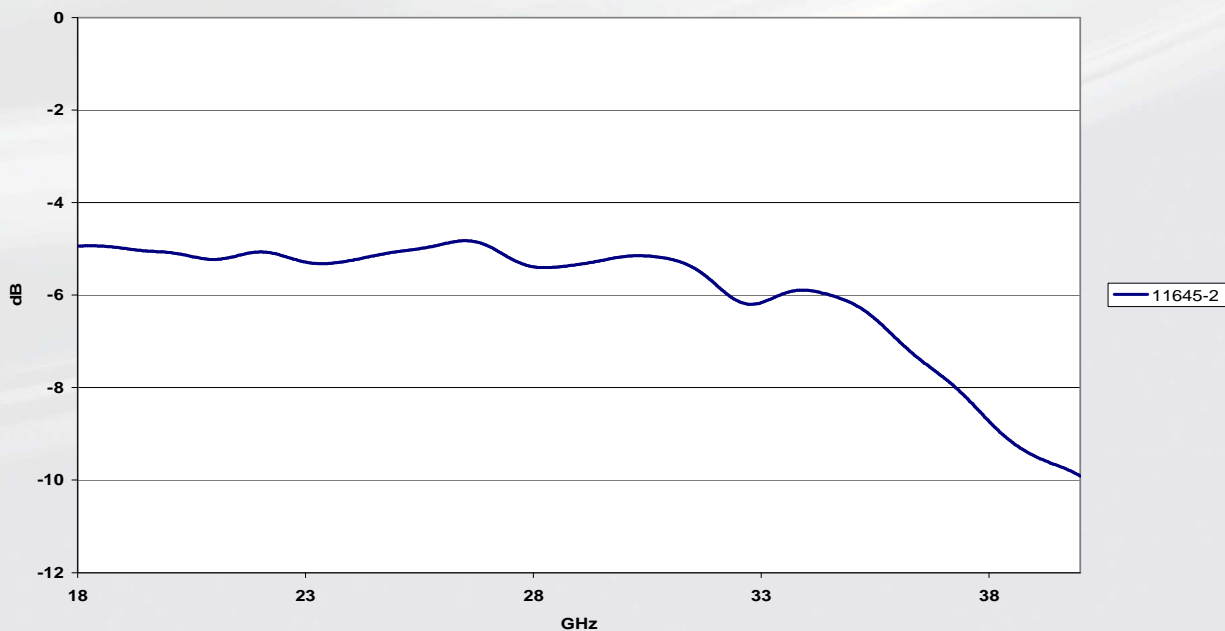

NOTE the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

www.arc-tech.com