

UD-12105-01

Description: Flexible, broadband, loaded urethane rubber based microwave absorber tuned for mode suppression in an enclosed cavity, signal isolation and surface current attenuation. This product comes with a PSA (Pressure Sensitive Adhesive). It is also halogen free, RoHS and REACH compliant.

Sheet Size: 12" x 12" \pm .125" (30.48cm x 30.48cm \pm 0.32cm)

Thickness: 0.030" \pm 0.005" (0.762mm \pm 0.127mm)


Temperature Range: -60° to +275°F (-51°C to 135°C)

Flammability Rating: ARC UD urethanes are UL94-HB rated

Optional Features

Waterjet Cutting
Die Cutting

Electrical Data (Typical Reflection Loss)

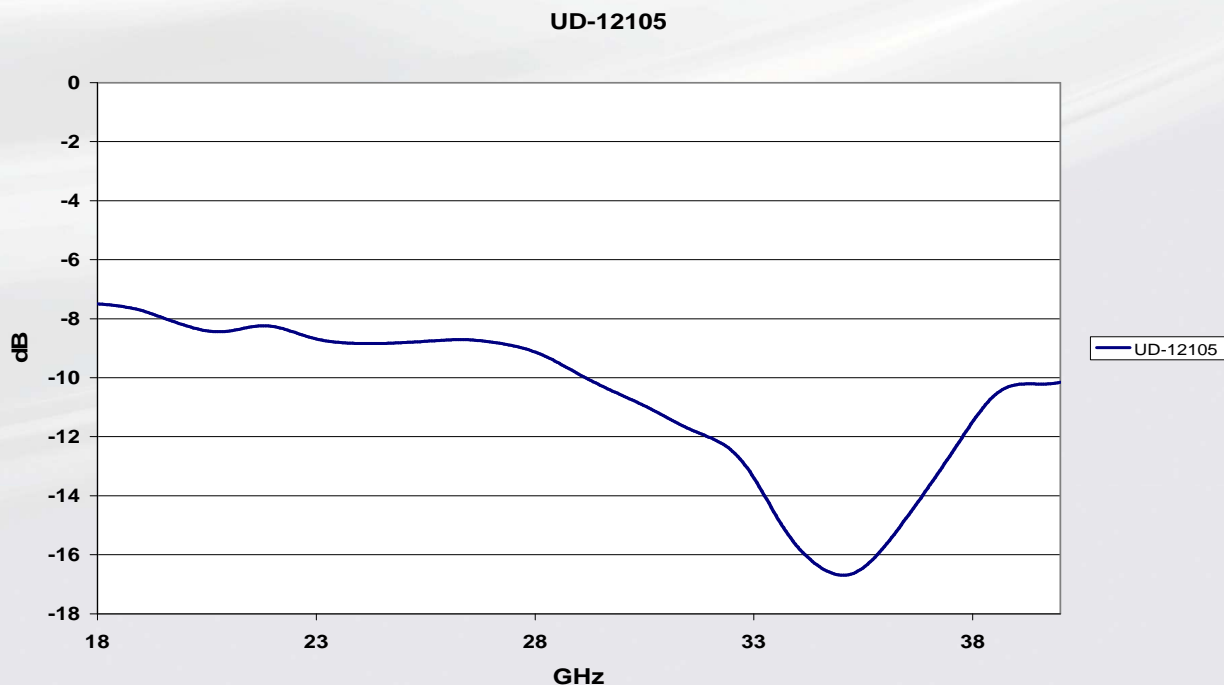

NOTE the information above is accurate at time of publication, but it is incumbent on the end user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

www.arc-tech.com