

## UD-13335-2

**Description:** Flexible, broadband, loaded urethane rubber based microwave absorber tuned for mode suppression in an enclosed cavity, signal isolation and surface current attenuation. This product is halogen free, RoHS and REACH compliant.

**Sheet Size:** 13" x 13"  $\pm$  .125 (33.02cm x 33.02cm  $\pm$  0.318cm)

**Thickness:** 0.150"  $\pm$  .0005" (3.81mm  $\pm$  0.127mm)

**Temperature Range:** -60° to +275°F (-51°C to 135°C)

**Flammability Rating:** UL94-HB (file number E204422)


### Optional Features

PSA (Pressure Sensitive Adhesive)

Waterjet Cutting

Die Cutting

### Electrical Data (Typical Reflection Loss)

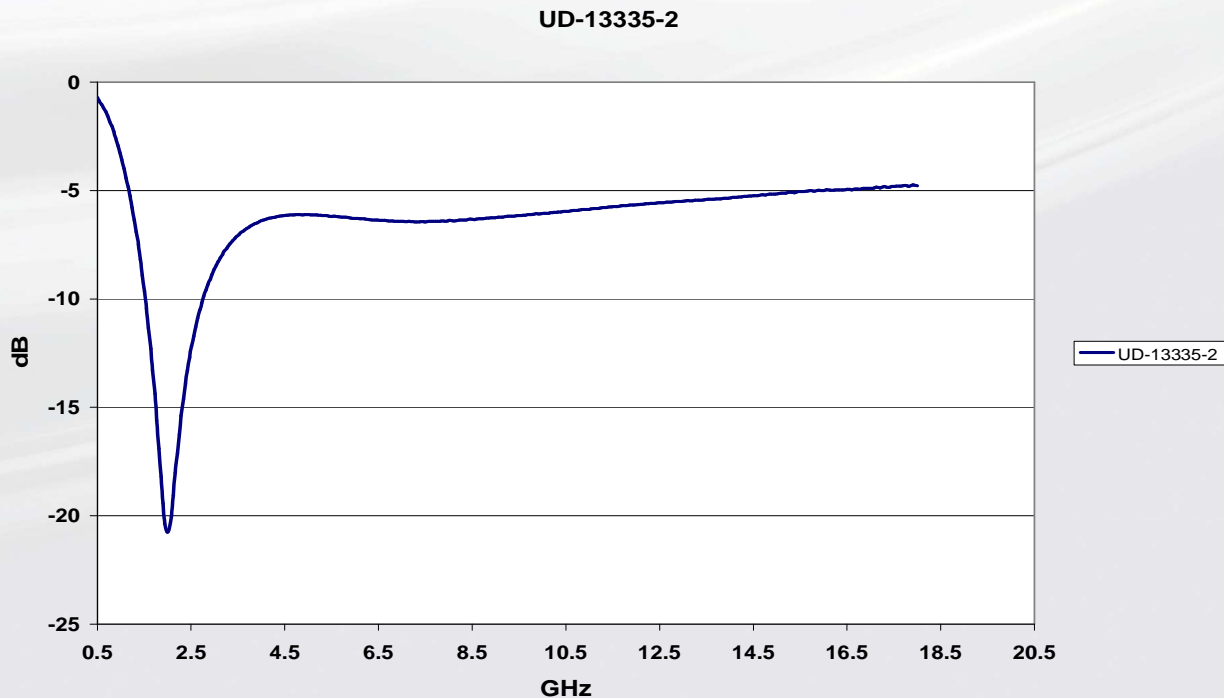

\*NOTE\* the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

[www.arc-tech.com](http://www.arc-tech.com)