

WK-A002

Description: Wave~X combines the highly effective energy absorption properties of proprietary high performance magnetic materials with the desirable physical characteristics of flexible elastomer.

Wave~X products provide superior EMI absorption through inductive coupling and are designed for close proximity placement to the transmission source. These flexible absorber sheets attenuate the radiated noise by suppressing magnetic fields at the source of the radiation

Sheet Size: 12" x 12" \pm 0.125"


Thickness: 0.002" \pm 0.005"

Temperature Range: -25°F to 194°F

Optional Features

PSA
Waterjet Cutting
Die Cutting

Electrical Data (Typical Insertion Loss)

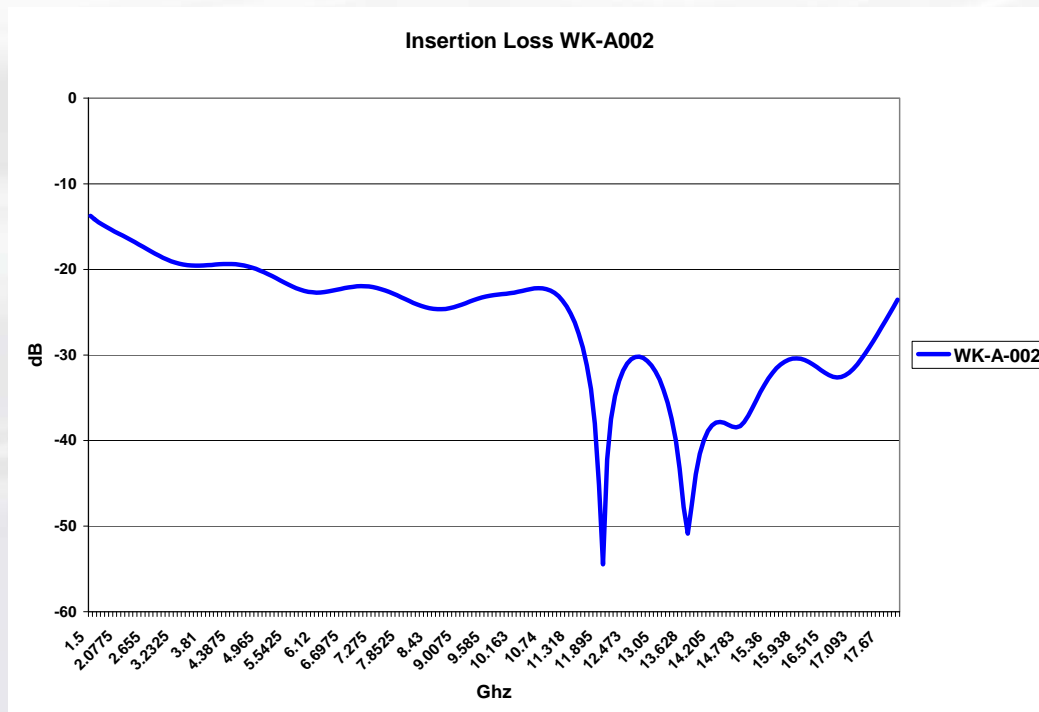

NOTE the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

www.arc-tech.com