

UD-11670-01

Description: Flexible, broadband, Iron Silicide loaded urethane rubber based microwave absorber tuned for mode suppression in an enclosed cavity, signal isolation and surface current attenuation.

Sheet Size: 12" x 12" \pm .125"


Thickness: 0.051" \pm .005"

Temperature Range: -60° to +275°F (-51°C to 135°C)

Optional Features

PSA
Waterjet Cutting
Die Cutting

Electrical Data (Typical Reflection Loss)

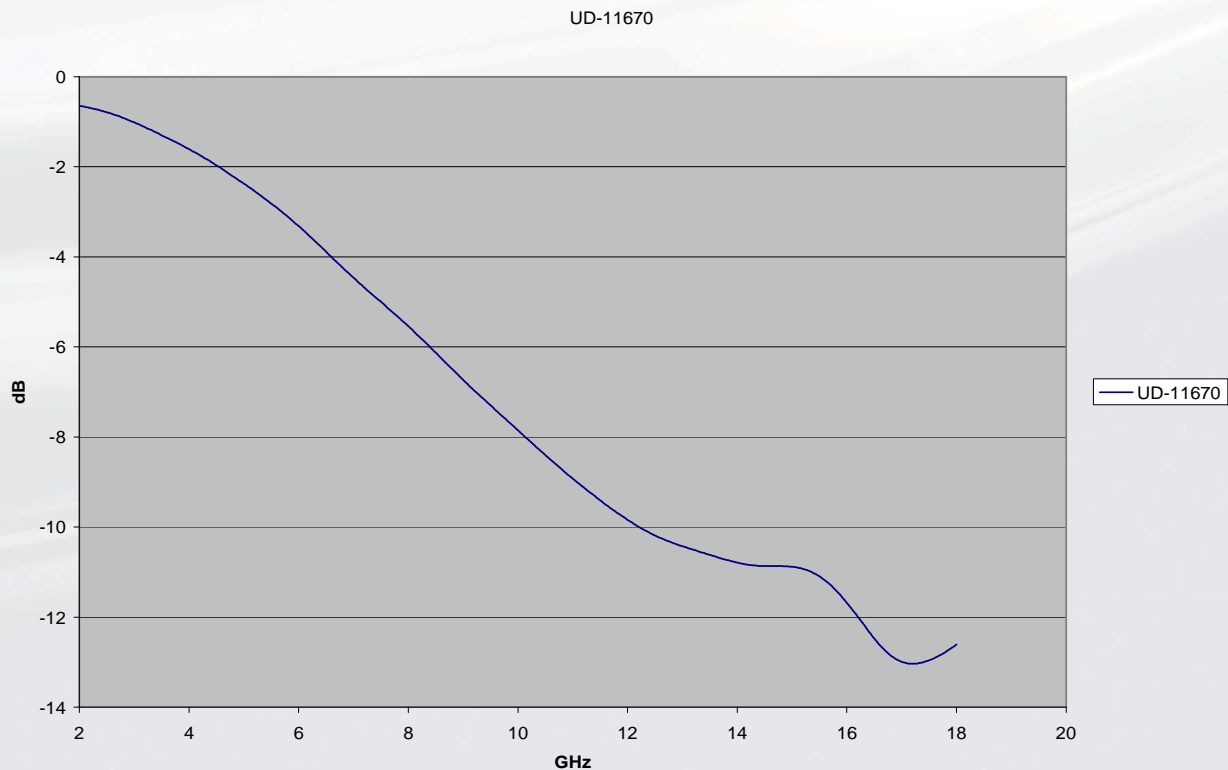

NOTE the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

www.arc-tech.com